




Performance



Sound absorption
 α_w : 0.90 (Class A)

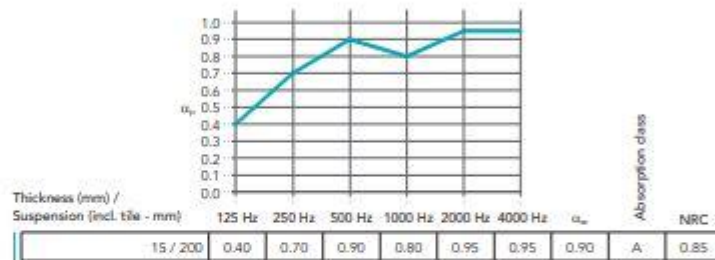

Reaction to fire
 A1



Fire protection
 The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified in accordance with European norm EN 13501-2 and/or national norms depending on requirements in national building codes. Some sizes and edge details of Rockfon Artic can be used with various Chicago Metallic grids and Rockfon systems to create a 30 minutes fire protecting ceiling in accordance with BS 476 Part 21 and Part 23. They can also be used to create a 30 minutes fire protecting membrane ceiling (integrity only) in accordance with BS 476 Part 22.



Light reflection
 82 %



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity
 C/0N



Cleaning
 - Vacuum



Hygiene
 Stone wool provides no sustenance to microorganisms



Environment
 Fully recyclable stone wool
 The recycled content of Rockfon products is between 29% and 64% according to ISO 14021.
 Rockfon acoustic solutions are Cradle to Cradle Certified® Silver and Bronze (depending on product type).



Carbon footprint
 Cradle-to-Gate 2.43 kg of CO₂ eq. (based on third party verified EPD)
 Cradle-to-Grave 3.19 kg of CO₂ eq. (based on third party verified EPD)



Indoor environment
 A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products

